


Electrical Properties:


Part No	Impedance Min.	Test Frequency @0.1V	IR Min.


Typical Electrical Characteristics:

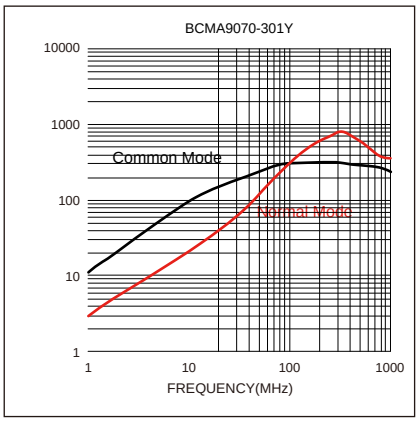


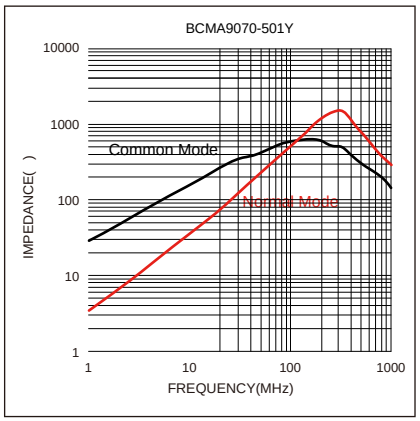

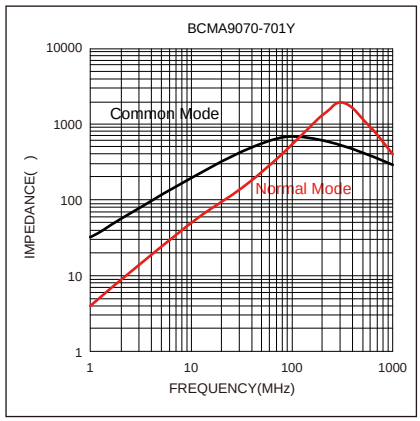

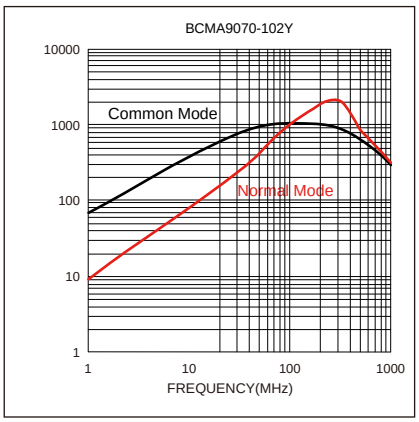

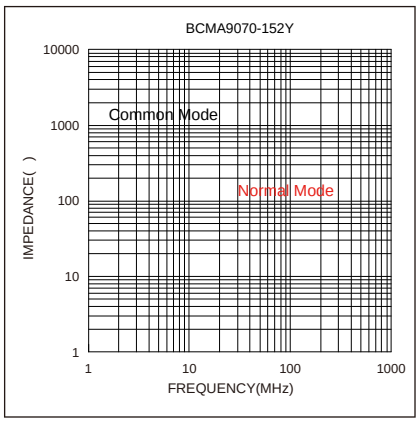

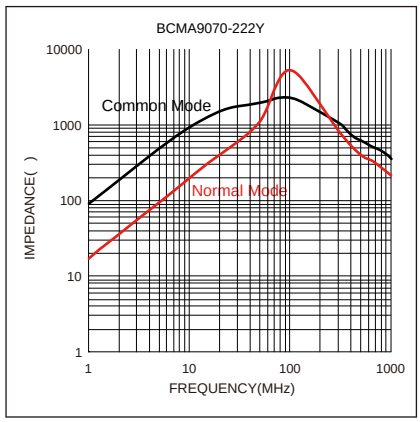

Soldering Reflow:

Preheat condition: 150 ~200℃/ 60~180 sec.

Allowed time above 217℃: 60~150 sec.

Max temperature: 260℃.

Max time at max temperature: 10 sec.

Allowed Reflow time: 3x max.

Packaging Information:


Tape Dimension:

A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
7.6±0.1	9.60±0.1	1.5±0.1	4.0±0.1	16.0±0.1	24.0±0.3	5.10±0.1	1.75±0.1	0.35±0.05


Product Marking:

Marking	Printing (Impedance)

Peel force of top cover tape:

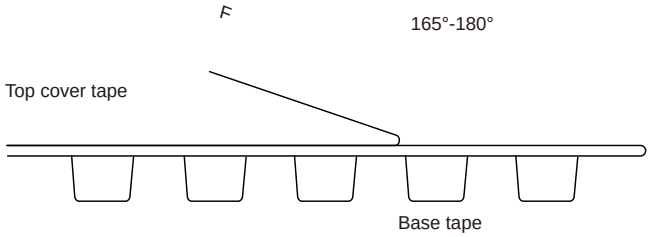

Reel Dimension：[mm]

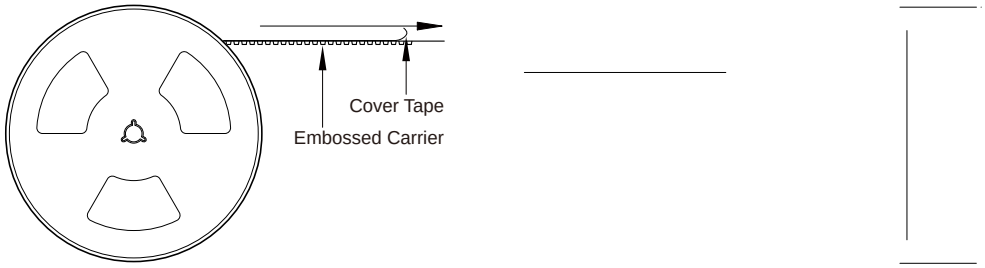

Packaging Quantity:

Cautions and Warnings:

Storage Conditions: