FBHE Series

SMD EMI Suppression Ferrite Bead
Size 1812




CHARACTERISTICS

- Monolithic inorganic material construc on.
- Closed magne c circuit avoids crosstalk.
- Suitable for reflow soldering.
- Available in various sizes.
- Quan ty: 1000pcs

APPLICATION

- Data lines and low power lines
- Connec on between digital and analog circuit

Dimensions: [mm]

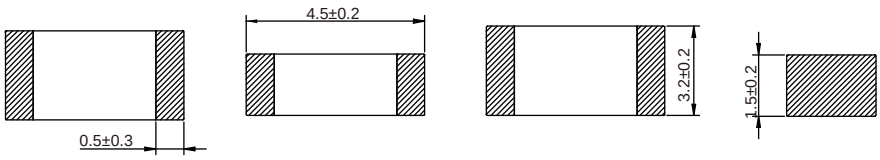

Land Pattern: [mm]




Electrical Properties:


	(Ω)		(max) (Ω)	Current (max) (mA)
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		


Opera ng Temperature: -55℃ ~ +125℃
Temperature rise current the actual value of DC current when the temperature rise is ΔT40℃


KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com


Impedance & Frequency Characteristics:

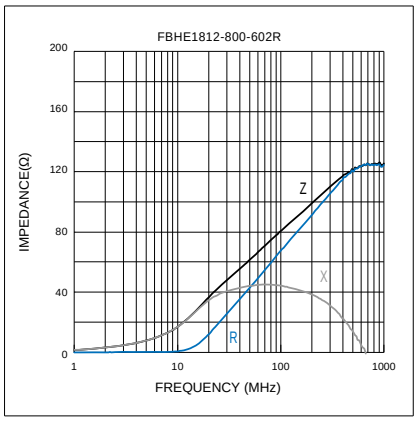


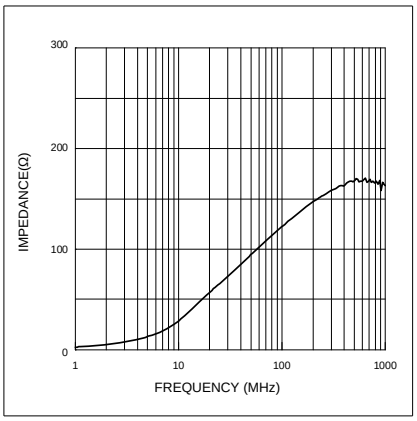

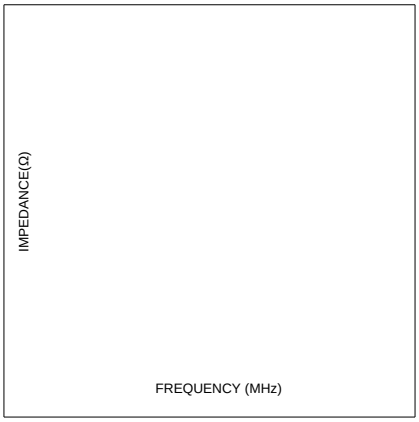

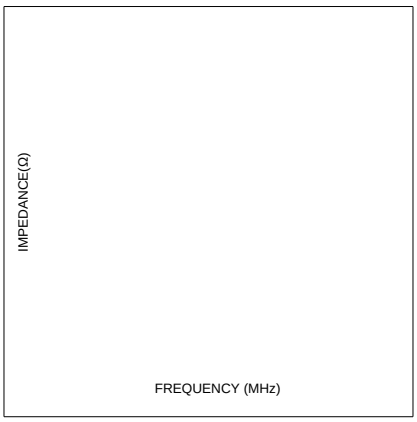

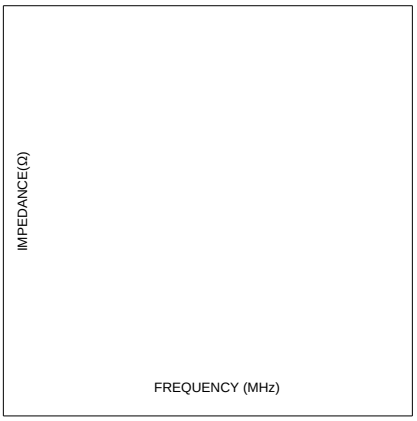

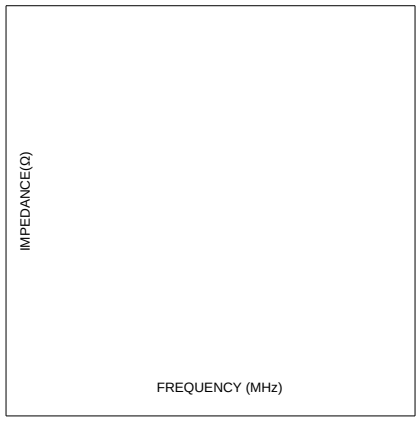

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com