

SMD Power Indutor
Size 3020





- 
- 
- , ,
- 
- 
- 
- 
- 
- 
- ,
- 

## Dimensions: [mm]

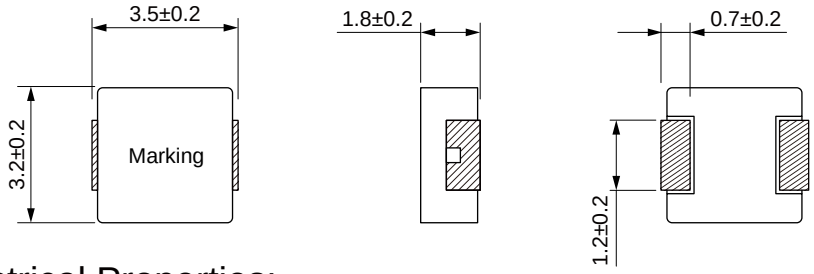



## Land Pattern: [mm]





## Electrical Properties:


| Part No | Inductance @ 100KHz/1V | Tolerance | Temperature Rise Current Typ. | Current Typ. | DC Resistance Typ. | DC Resistance Max. |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |


Saturation Current will cause L to drop approximately 30%
Temperature Rise Current: The actual value of DC current when the temperature rise is △T=40°C

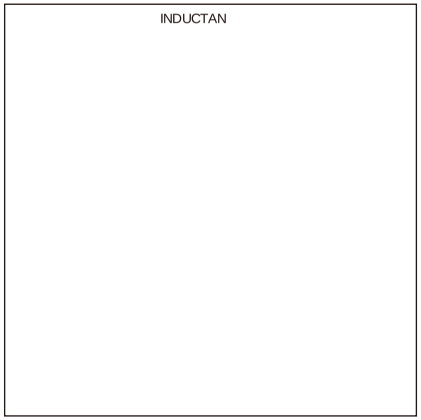
INDUCTAN

# Typical Electrical Characteristics:

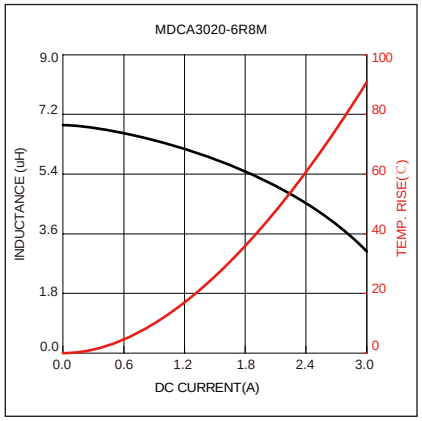

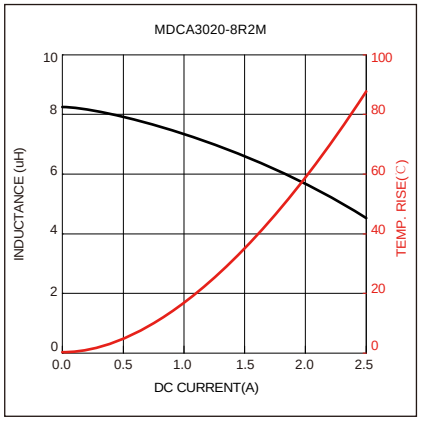


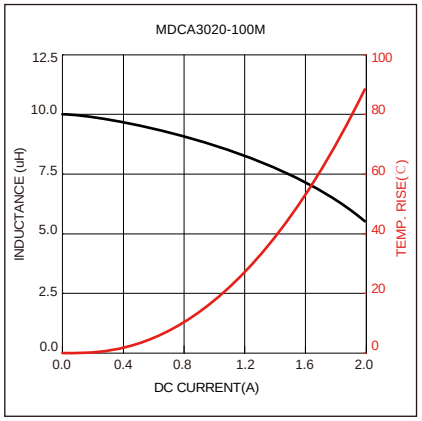
## Soldering Reflow:

## Packaging Information:


Tape Dimension:

Peel force of top cover tape:

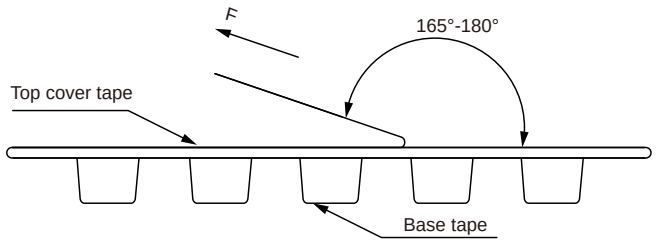



The peel force of top cover tape shall be between 0.1 to 1.3 N

Reel Dimension：[mm]

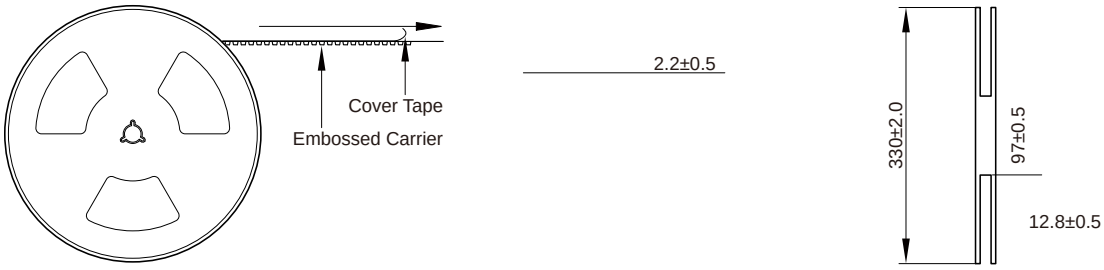


Packaging Quantity:



3000 Pcs/Reel

3 Reel /Inner box( 9000 Pcs)

3 Inner box/Carton box(27K Pcs)

## Cautions and Warnings:

Storage Conditions：

Operation Instructions: