
MDSA Series




FEATURES

- Shielded construc on
-
-
-
- Ultra low buzz noise, due to composite construc on.
-
- AEC-Q200 qualified
- Opera ng temperature: -55 to +155 °C(including self-temperature rise)
- Quan ty: 500PCS


APPLICATION


- Noise filter for various drive circuitry requiring high temp. opera on and peak current handing capability.
- Boost-Converter
- Buck-Converter DC/DC

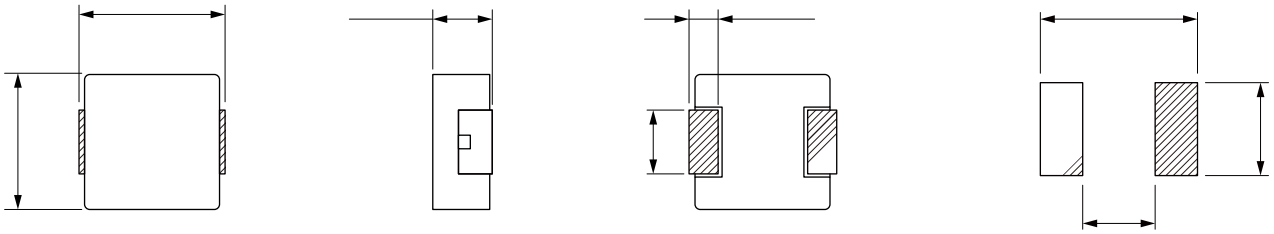


Temperature Rise Current Max. (A)		Satura on Current Max. (A)	E (mm)
		38.5	
			2.5±0.3
			2.5±0.3 2.5±0.3
12.5		13.5	
6.95			
5.80			

△

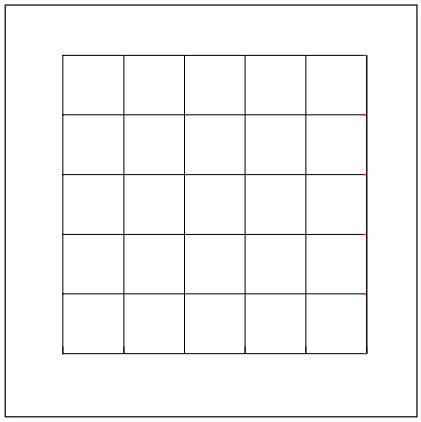

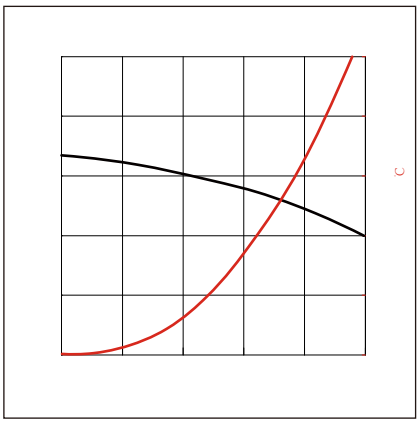

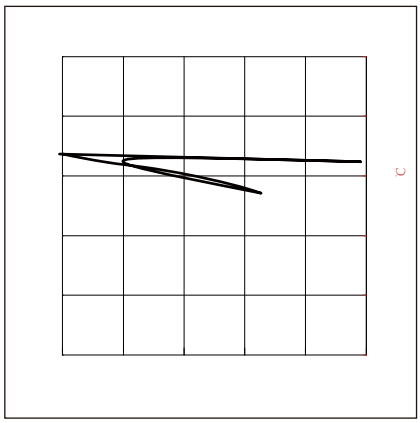


℃

℃

℃


:

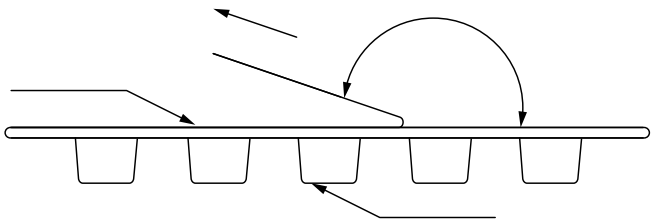


The peel force of top cover tape shall be between 0.1 to 1.3 N

Marking	KH+Printing Inductance+period)

:

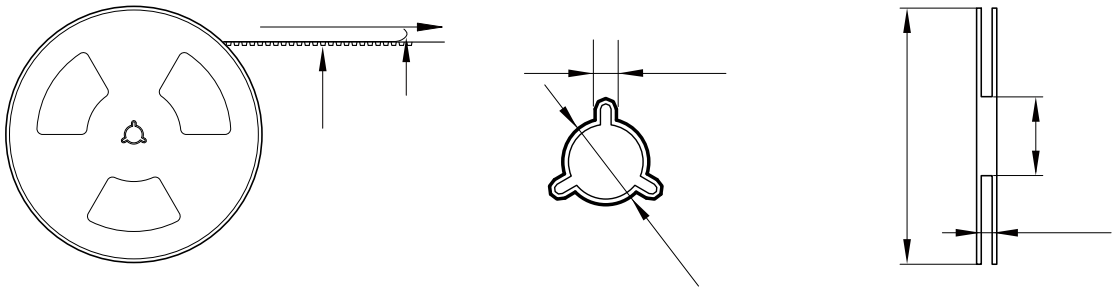

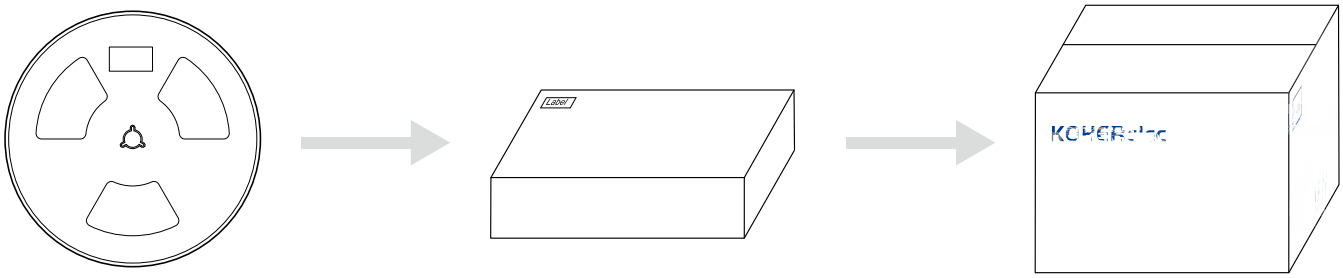

500 Pcs/Reel

2 Reel /Inner box(1000 Pcs)

3 Inner box/Carton box(3K Pcs)

:

-
-
-
-
-
-
-
-